





Eave Panel - Standard Overhangs EP-SO Drip Edge Extension EP-DEE

Overview

The IceBlaster™ Eave Panel (EP-SO) is specifically designed to prevent ice dam and icicle build up at the eaves. The highly efficient system is comprised of an aluminum extrusion base panel which houses two runs of industrial grade self regulating heat cable. Uses for the EP-SO are roof edges, dormer edges and other areas where roof slopes present ice dam and icicle problems. Installation is simple. Base extrusion mounts over existing first course of shingles with counter sunk exterior grade screws. Route two runs of industrial grade self regulating heat cable. Pre-finished aluminum cover panel slides under second course of shingles and is riveted to base panel for maximum heat transfer. Route any heat cable in gutter and downspout(s).

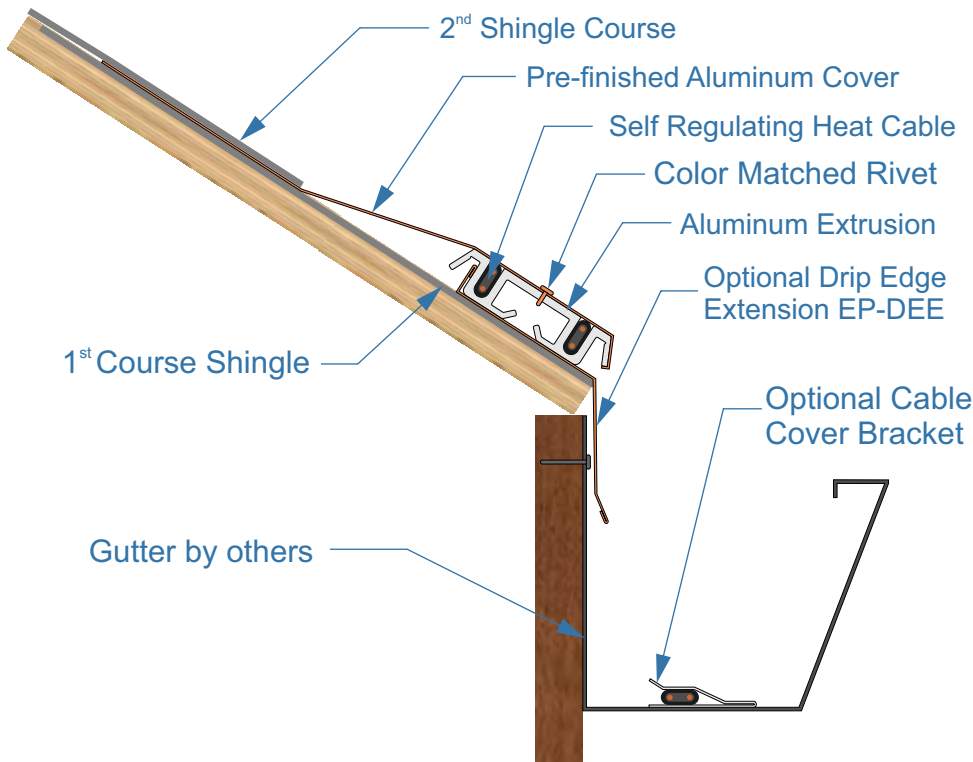

NOTE: Some roof assembly features omitted for clarity. IceBlaster products are fully compatible with most roof styles and systems. IceBlaster™ Eave Panel can be installed on a roof overhang without a gutter. Cable Cover Bracket (CCB) is optional. Optional Drip Edge Extender can be used when no drip edge is present or when the EP-SO must be positioned further up on the roof. The Drip Edge Extender provides for heat transfer on the roof edge.

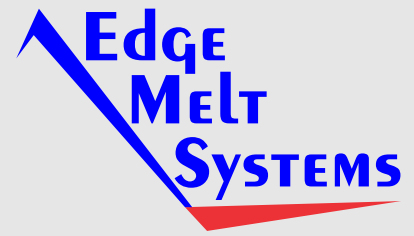

Performance:

2 runs of self-regulating industrial grade heat cable

Base Extrusion:

6063 T5 Aluminum

Cover Panel:

0.040" Kynar 500 pre-finished aluminum

Warranty:

50 yr on base panel
30 yr on cover panel finish
10 yr on supplied heat cable
See Warranty for complete details

Supplied Components:

Base extrusion
Panel cover
Splice covers
Mounting hardware
C/US Listed self-regulating heat cable

Options:

110-130v or 208-277v in 5, 8, & 10 watts/foot self regulating heat cable

Standard Colors: Medium Bronze, Matte Black, Dark Bronze, Hartford Green, Mansard Brown, Slate Gray, or Charcoal Gray

Additional Cost Options

20 oz. solid copper

Special Order Colors: Complete line of UnaClad aluminum colors

Standard 10' lengths, can be cut to length